



Art. 017.168.79

<https://www.brouwland.com/en/qr/017.168.79>


## Ss Brewtech™ Unitank 79 I (half barrel) °C

Ss Brewtech introduced their line of Unitanks with the nano-sized 1 bbl Unitank, now they have made all the features of a professional Unitank available to the home brewer as well. 100% TC connections, lid mounted immersion chiller coil for temperature control and crashing, and the ability to carbonate in-vessel make the Unitank the very best fermenter on the market.

- Max. operating pressure: 15 psi
- Fully welded TC flanges
- Combination 3" TC dry hop, CIP and pressure relief valve port
- 3" TC cap with pressure relief valve
- 1.5" TC carbonation stone with 3/8" ball valve
- 1.5" TC blow-off cane with welded blow-off arm mount
- 1.5" TC to 1/2" ball valve for blow-off cane
- 1.5" TC pro sanitary pressure gauge
- 1.5" TC pro sanitary sampling valve
- 1.5" TC thermowell with LCD thermometer
- 6" TC lid with fully welded chiller coil
- Neoprene insulation jacket
- Butterfly valves with racking arm
- Stainless steel lower shelf
- Adjustable feet

### Specifications:

- 304 stainless steel construction
- Total capacity: 79 liter (21 gal)
- Height (floor to pressure gauge): 43.5" (110.49 cm)
- Max. width (blow-off cane to carbonation stone): 19" (48.26 cm)
- Max. pressure; 30 psi; operating pressure: 15 psi

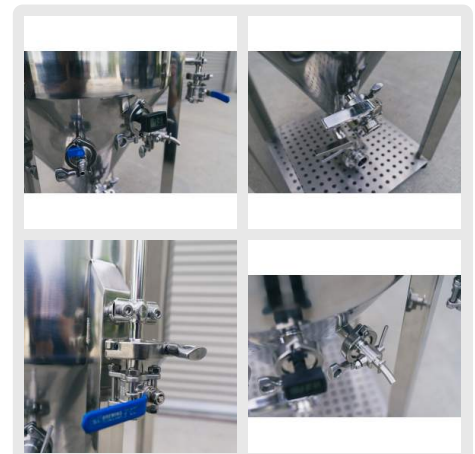

### Specification

Packing dimensions and weight:

Weight	30 kg
Length	50.5 cm
Height	105.5 cm
Width	51 cm
EAN code	5420069837471

Brouwland bv  
BE 0412.461.618  
Korspelsesteenweg 86, 3581 Beverlo - Belgium

Tel. +32 11 40 14 08  
Contact [www.brouwland.com](http://www.brouwland.com)  
Web [www.brouwland.com](http://www.brouwland.com)